




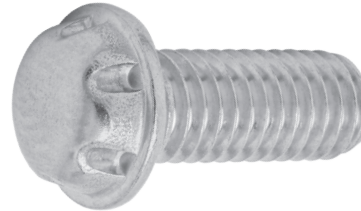

System Zero® - Flange Head Machine Screws - Zinc Plated

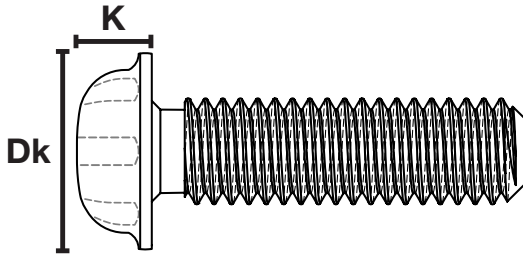

Dimensions (mm)

BOX QTY 100

DIAMETER Thread Pitch	LENGTH											DRIVER SIZE
	Dk	K	6mm	10mm	12mm	16mm	20mm	25mm	30mm	40mm		
M2.5 x 0.4	5.3	2.1	SZM2506-Z		SZM2512-Z							SZ3
M3 x 0.5	5.3	2.1	SZM0306-Z		SZM0312-Z							SZ3
M3.5 x 0.6	7.2	2.6	SZM3506-Z		SZM3506-Z							SZ4
M4 x 0.7	7.2	2.6	SZM0406-Z		SZM0412-Z		SZM0420-Z	SZM0425-Z				SZ4
M5 x 0.8	8.7	3.4			SZM0512-Z		SZM0520-Z	SZM0525-Z	SZM0530-Z	SZM0540-Z		SZ5
M6 x 1.0	10.6	4.1		SZM0610-Z		SZM0616-Z	SZM0620-Z	SZM0625-Z	SZM0630-Z	SZM0640-Z		SZ6

Material and Finish

Material: Steel
Heat Treatment: Case Hardened
Finish: Zinc Plated



Zinc is an electrodeposited lightweight plating that gives a sacrificial protection to underlying substrates (carbon steel).

This method lays a thin layer of zinc over the surface meaning the zinc plating would corrode in preference to the substrate and therefore protecting the covered steel product.

Thickness and Passivation	Salt Spray (hrs)	
	White Rust	Red Rust
3µ CR3+	24	72

Additional Information

Installation: Extra Long (75mm) insert bit

Removal: 2-Way Removable Screw



Every effort has been made to ensure the accuracy of information provided in this catalogue. Hafren Fasteners cannot warrant the information however, expressly or implied, and any liability arising from it is expressly excluded. Customers must satisfy themselves as to the suitability of products and the technical information relating to them, and it is recommended that you conduct your own tests to establish suitability. All sizes shown are in mm without min and max tolerances and are guide sizes. Hafren Fasteners reserve the right to change/alter sizes without notice. This does not effect your statutory rights.